




Fire Rated Putty

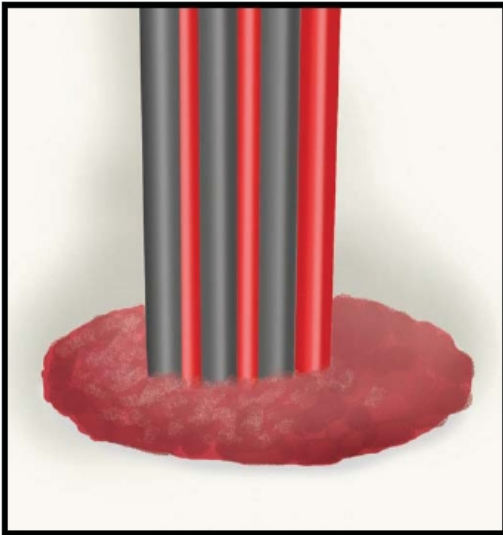

- Halogen free formula
- Free from corrosive gases during a fire
- Minimal odor
- Long shelf life – does not dry out or crumble
- Semi-permanent
- Easily removed and reused
- Adheres to all common building surfaces
- Non-toxic, contains no asbestos
- No kneading required

Abesco Fire Rated Putty is an intumescent elastomer that remains flexible and can easily molded to fit around cable bundles and other irregular shaped services.

When correctly installed, it adheres to all commonly used building materials providing a cold smoke and draft seal along with up to 3 hours fire resistance.

Color: Red-Brown
 Volume: 13.85 cu. in.
 Density: 10-12 lbs/gal (1,20-1,45 kg/l)
 Length: 9 in.
 Width: 1.4 in. diam.

Tested in accordance with ASTM E814,
 UL1479 UL classified up to 3 hour rating



Ordering Information

Part	Description	Color	Unit	Case	Pallet
30750	Fire Rated Putty	Red - Brown	9 in. Stick	18	1800 units