



REMKE CUSTOM BUSHING DESIGN GUIDE

For a quotation on a custom multiple hole bushing, please complete this form and either fax it to Remke at 847-541-7245 or email a copy to customercare@remke.com.

Quotation No. _____

Date _____

Customer _____

Address _____

City _____

State _____ Zip _____

Phone _____

Fax _____

Contact Email _____

How To Order A Complete Assembly

Step 1: Determine the bushing series size you need by laying out multiple conductors in the circles below which represent each size. This process will also help you determine the conduit size.

Step 2: Determine what connector material best suits your application and use the matrix chart to confirm that the bushing fits with the desired connector size and material.

Step 3: Copy and fax the completed design guide form to Remke at 847-541-7245.

Creating A Full Assembly Part Number For Existing Bushings

Once you have identified the custom bushing needed, to create a full assembly part number you will need to substitute the prefix of the material of construction you want for the prefix in the bushing only part number.

Material Prefix:

- RSR:** Aluminum
- RSRN:** Nickel-Plated Aluminum
- RSRS:** Steel
- RSSS:** Stainless Steel
- RSP:** Nylon
- RSPV:** Valox


Example: The part number for Bushing SRB-104-2 as a complete assembly to fit into an aluminum cord connector would be RSR-104-2. To fit into a nylon connector, the part number for Bushing SRB-104-2 would be RSP-104-2.

BUSHING SIZE – CONNECTOR MATERIAL MATRIX

Based on conduit size and material of construction, custom bushings can fit into all or some of the Remke cord connectors. This matrix will help you determine what is available.

Conduit Size	Bushing Series	Aluminum and Nickel-Plated		Stainless Steel	Nylon and Valox
		Aluminum	Steel		
1/2"	000	X	X	X	X
3/4"	100	X	X	X	X
1"	200	X	X	X	—
1 1/4"	300	X	X	X	—
1 1/2"	400	X	X	X	—
2"	500	X	—	X	—
2 1/2" or 3"	600	X	—	X	—

NOTE: Bushings available for 3" connectors. Consult factory.

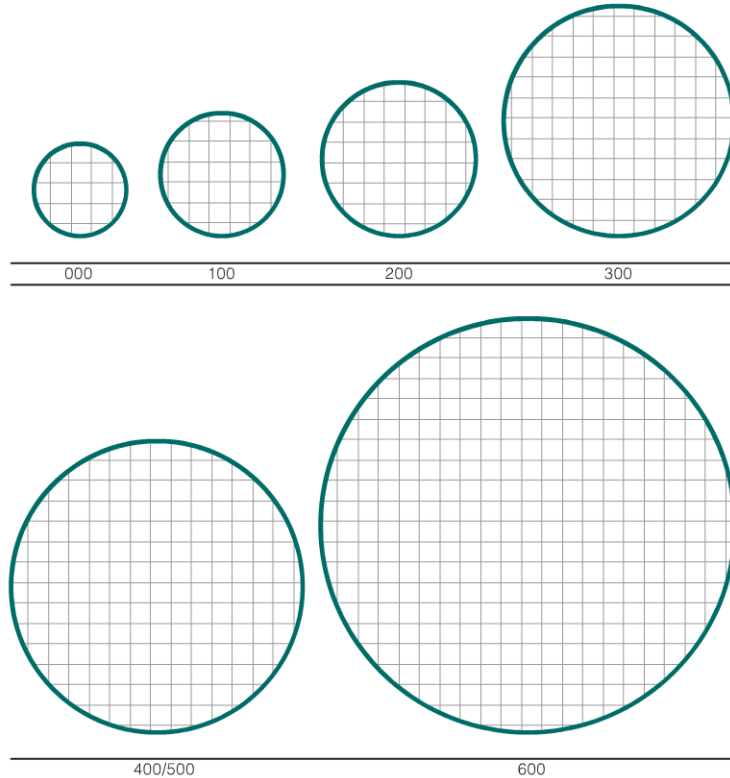

CORD CONNECTORS

WIRE MESH GRIPS

PICO-LINK

MICRO-LINK

MINI-LINK

MULTI-PORT BOXES

BUS SYSTEM PRODUCTS



MULTIPLE HOLE BUSHINGS



The Tuff-Seal family of Multiple Hole Bushings are the answer when multiple conductors need to be terminated into one fitting. With over 300 configurations available, when you use Remke multiple hole bushings you'll save both money and space by using a single bushing & cord connector instead of separate cord grips for each length of cable.

Any of our Multiple Hole Bushings can fit into any standard Remke cord connector made from aluminum, nickel-plated aluminum, steel, stainless steel, nylon or Valox®. Standard bushings are made from Neoprene but optional materials include silicone for high-temperature applications.

MULTIPLE HOLE BUSHINGS

Bushing Only Part Number	Form Size	Number of Holes	Diameter Each Hole (IN)	Conduit Size
SRB-100-UF1	2	1	Oval - .425 x .225	1/2" or 3/4"
SRB-100-UF2	2	1	Oval - .610 x .225	1/2" or 3/4"
SRB-103-2	2	2	.187	1/2" or 3/4"
SRB-104-2	2	2	.250	1/2" or 3/4"
SRB-104-3	2	3	.250	1/2" or 3/4"
SRB-10532-2	2	2	.156	1/2" or 3/4"
SRB-10532-3	2	3	.156	1/2" or 3/4"
SRB-10532-4	2	4	.156	1/2" or 3/4"
SRB-10564-2	2	2	.078	1/2" or 3/4"
SRB-10732-2	2	2	.218	1/2" or 3/4"
SRB-10732-3	2	3	.218	1/2" or 3/4"
SRB-10932-2	2	2	.281	1/2" or 3/4"
SRB-201764-2	3	2	.265	1/2" or 3/4"
SRB-201764-3	3	3	.265	1/2" or 3/4"
SRB-201964-2	3	2	.296	1/2" or 3/4"
SRB-201964-3	3	3	.296	1/2" or 3/4"
SRB-201964-4	3	4	.296	1/2" or 3/4"
SRB-202164-2	3	2	.328	1/2" or 3/4"
SRB-203-4	3	4	.187	1/2" or 3/4"
SRB-204-2	3	2	.250	1/2" or 3/4"
SRB-204-3	3	3	.250	1/2" or 3/4"
SRB-204-4	3	4	.250	1/2" or 3/4"
SRB-205-2	3	2	.312	1/2" or 3/4"
SRB-20516-3	3	3	.312	1/2" or 3/4"
SRB-20732-2	3	2	.218	1/2" or 3/4"
SRB-20732-4	3	4	.218	1/2" or 3/4"
SRB-20932-3	3	3	.281	1/2" or 3/4"
SRB-300-3SP1	4	3	.300	3/4" or 1"
SRB-300-3SP2	4	3	.225	3/4" or 1"
SRB-300-4SP1	4	4	.220	3/4" or 1"
SRB-300-4SP2	4	4	.340	3/4" or 1"
SRB-301964-2	4	2	.296	3/4" or 1"
SRB-301964-4	4	4	.296	3/4" or 1"
SRB-301964-5	4	5	.296	3/4" or 1"
SRB-303-3	4	3	.187	3/4" or 1"
SRB-303-4	4	4	.187	3/4" or 1"
SRB-304-5	4	5	.250	3/4" or 1"
SRB-305-3	4	3	.312	3/4" or 1"
SRB-306-2	4	2	.375	3/4" or 1"
SRB-500-2	5	2	.500/.375	1 1/4" or 1 1/2"
SRB-506-3	5	3	.375	1 1/4" or 1 1/2"
SRB-508-2	5	2	.500	1 1/4" or 1 1/2"
SRB-509-3	5	3	.562	1 1/4" or 1 1/2"
SRB-510-2	5	2	.625	1 1/4" or 1 1/2"

NOTE: Numerous other configurations are available as stock items. Consult factory.